Installing Your LitterVent Kit

Kit Contains:

1. Rigid Foam Window Insert
2. Hoses
3. Hole Saw Bit
4. Rubber Gasket
5. LitterVent Fan Unit
6. Power Supply
7. Gray Soft Foam Strip

Cat and liter box Not Included

Tools You Will Need:

1. Straight Edge Ruler
2. Pencil or Marker
3. Tape Measure
4. Serrated Edge Knife
5. Drill

Begin by opening the window you have chosen.

1. Measure the inside opening of the window from side to side.
2. Place window insert on flat surface with vent hole to the left.
3. Mark measurement on foam insert on the right side end.
4. Place straight edge on the mark.
5. Cut with serrated knife.
6. Place window insert in window and shut window snuggly onto foam. (If security or child safety are issues, please purchase window limiters from your hardware store.)

Tuck the gray foam strip as shown to prevent drafts. Snip off excess.

1. Place hole saw bit attachment onto your electric drill and tighten.
2. Most covered litterboxes come with a charcoal filter insert. If yours does then:
    - Remove filter
    - Replace with cardboard

Drill and Assemble

1. Position the drill bit on the back upper hood of the litter box.
2. Drill hole applying light pressure.
3. Fit rubber gasket into hole.
4. Insert hose into gasket.

5. Place other end of hose into the LitterVent fan unit.
6. Place second hose into opening marked ‘Exhaust’.
7. Place other end of second hose into window outlet.
8. Plug power supply into fan unit jack.
9. Plug the power supply into the wall. It’s pretty quiet, You will have to listen closely to make sure it is on.

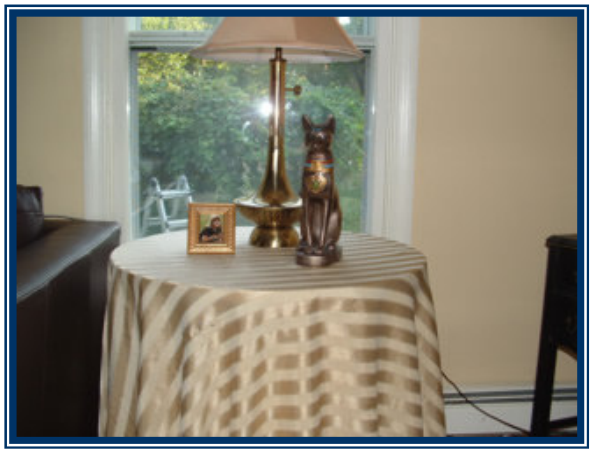

LitterVent is so odor free that you can put your litter box anywhere in your home!

LitterVent.com
You may call us at:
(781) 585-3376
If you have any questions or comments

Yours,
Nancy and Jerry Cicierega